
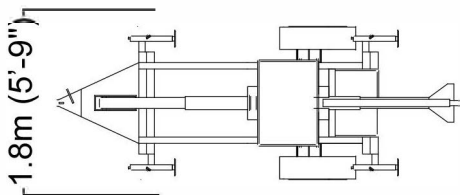
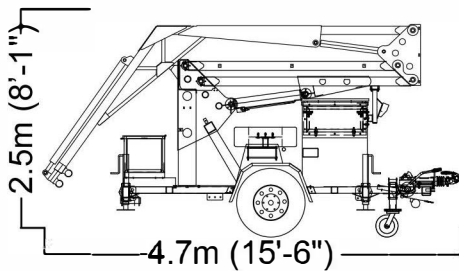


X1240 SPEC SHEET

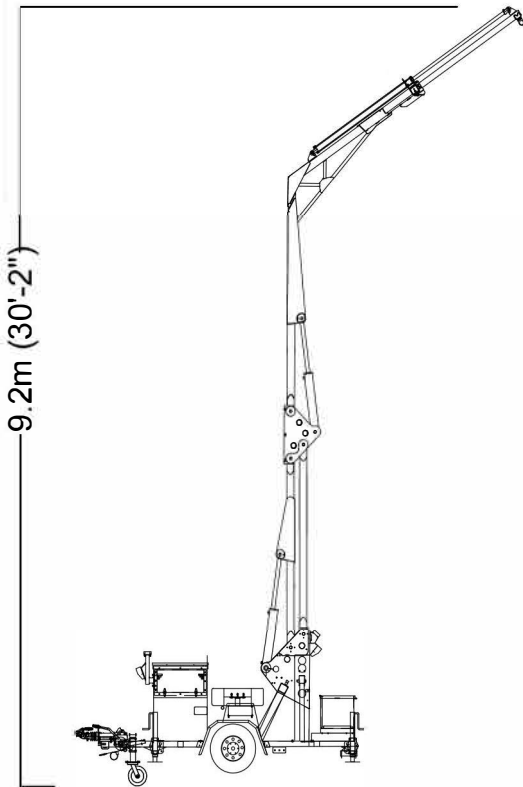

Safety Standards	
EN 795-2012 Class B / OSHA Fall Arrest Standards	
Applicable fall arrest standards set forth in ANSI Z359.6	
General	
Max. Working Height	9.2m (30'-2")
Min. Working Height	0.6m (2')
Max. Folded Height	2.5m (8'-1")
Frame Width	1.8m (5'-9")
Max. Arm Reach Out	1.5m (4'-5.5")
Overall Length	4.7m (15'-6")
Total Weight	2676 kg (5900 lbs)
Max. Anchor Point capacity	141kg (310 lbs)
Max. Allowable Users	2
Towing	
Max. Towing Speed	Posted Highway Speed
Axle	3175kg Torsion Axle w/ Cable Brakes
Tyres	225/75/R16 Radials
Receiver	450mm (approx)
Trailer Plug Wiring	7-Pole Blade Style lead
Operation	
Actuating Method	Electric-driven Hydraulic system
Controls	Remote (15 ft. cord length)
Power Source	12 volt Battery (210 Amp hour rating) w/30A Fuse & Battery Guage
Charging System	220/110 Volt quick Smart Charger
Outrigger System	Four (4) Manually Adjustable Jacks
Hydraulics	
Fluid Type	Mobil DT10 Excel 22
Fluid Capacity	47.3L (12.5 Gallons)

*SRLs not included.

www.highworx.ie

www.highworx.ie

+353 (0) 1 5563424

sales@highworx.ie

Company Registration Number: 469261